

C Series & SG Series

Arm Adjustment : Forward and Backward

ADVANING®

- 1 Retract the awning back to the fully closed position.
- 2 Position yourself under the awning (not in front of the awning/arms).

While making the adjustment, have an assistant help support the awning arm that is ajar.

You will need a wrench and a sturdy ladder.




- 3 Slightly loosen the adjusting bolt with a quarter (1/4) counter-clockwise turn.

- 4 Gently press the outward arm back to its proper location.

- 5 Tighten the adjusting bolt with a clockwise turn.

Repeat the process until both arms are back in its proper location.
Repeat for the left arm if needed.

Secure the inner, outer arms and valance to the entire awning with ties or straps.
(Electric awnings: Please disconnect the power source)

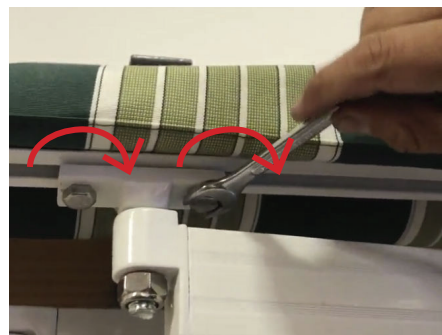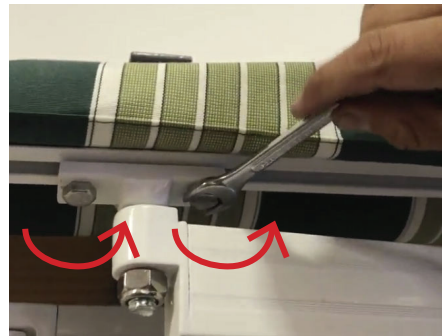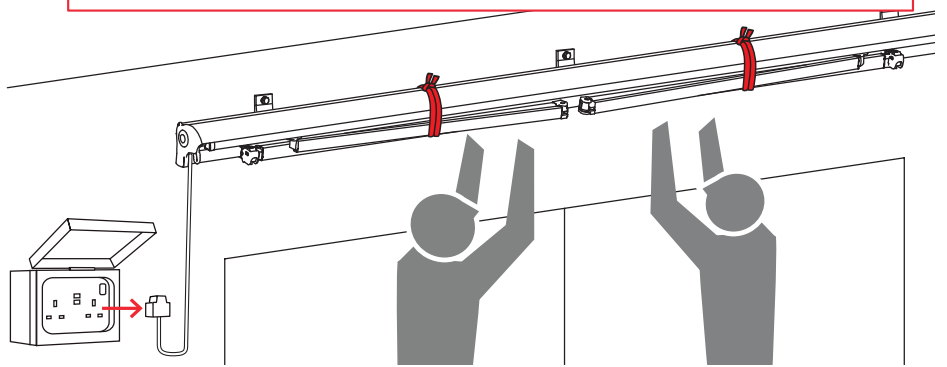

Our team prides itself on quality in product and service.

Should you have any concerns or questions, do not hesitate to reach us at service@advaning.com.