



- ① <IMPORTANT> Fully close the awning with both arms folded. Securely tie both arms to the entire awning including the square torsion bar. Have a helper to hold and press the tied/folded arms.

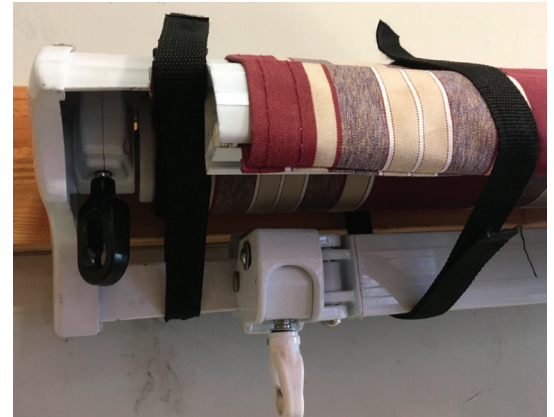

- ② Loosen the 2 screws (located at front and back) on the Open/Close Gear Box end cover.

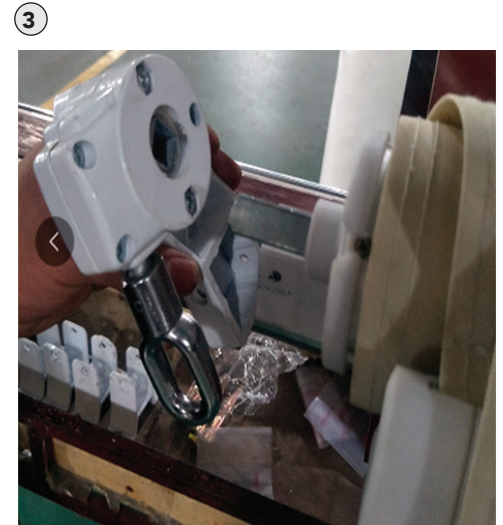

- ③ Remove the defective Open/Close Gear Box with its end cover.

- ④ Loosen the screw inside of the Open/Close Gear Box to separate the defective Gear Box from the end cover.



- ⑤ Replace with a new Gear Box. Tighten the screw to secure the new Gear Box back to the end cover. Tighten the screw to secure the entire new Gear Box with end cover to the awning.



Our team prides itself on quality in product and service.

Should you have any concerns or questions, do not hesitate to reach us at [service@advaning.com](mailto:service@advaning.com).